


# AD 710

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	710,00	568,00	640,00	512,00	923,80

fP GDE

GC, ) &

) & z

fDF DE

%\$1

%

%&

GC" \$(\*"

z&(

GC

## Standard Specifications

### ALTERNATOR

D: A Z' 5J F

### TRANSFER SWITCH

# AD 710

Doosan  
Mecc Alte  
D+' &''

Manufacturer	Doosan		
Model	DP180LB		
		%\$\$' "# "	
		612,00 kw [820,00HP]	
	L	18,273	
	"	128 x 142	
		15,0:1	
	fl # ı	"# "	1500
	fl "ı	L	34,00
		L	112,20
AbsorbedAirDischargeReSourceKey.Text	' # "	36,00	
	' # "	700,00	
	' # "	118,00	
	° C	587,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# "	)\$ı	
		136,40	103,80 71,20


	Mecc Alte		
	ECO40 2L/4		
	Hz	50	
	"	680,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	981,50	

		fl "ı		fl "ı	
	"	"	"	"	L
AD 710	4940,00	3359,00	1550,00	2056,00	850,00
		fl "ı		fl "ı	
	"	"	"	"	L
MS 80	4940	4810	1606	2615	850



# AD 710

Doosan  
Mecc Alte  
D+' &'

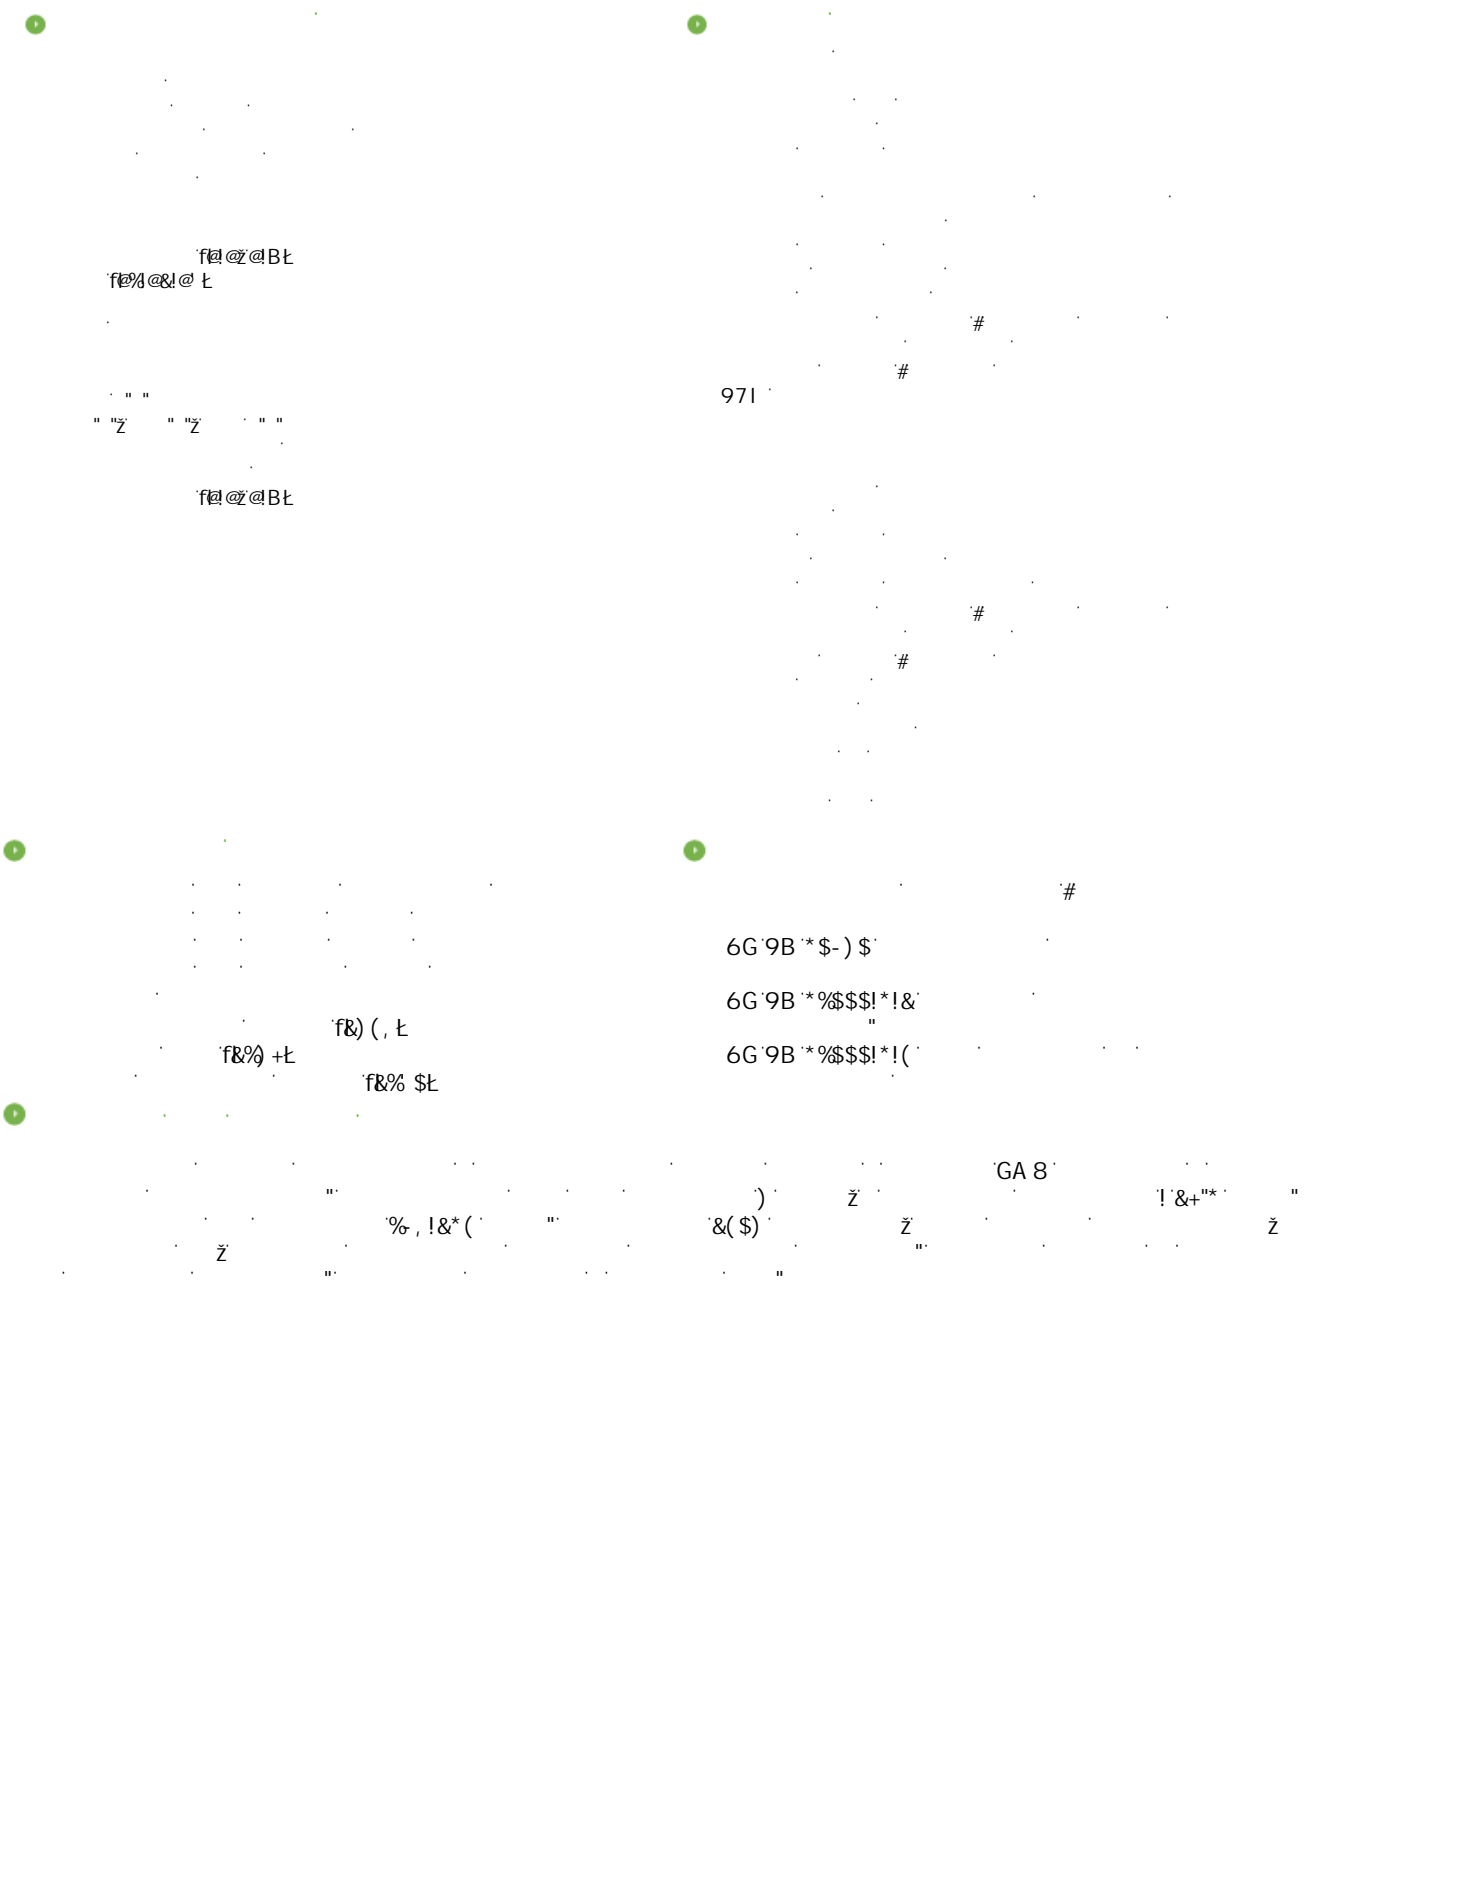

# AD 710

Doosan  
Mecc Alte  
D+' &''



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850