

AVP 550

Volvo Penta
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$%
CE	

2000/14/EC & \$\$\$#(#
z) \$ z'z' D:

	kw	Amp
400/230	550,00	721,70
	440,00	
	500,00	
	400,00	

fP GDE GC,) &
fDF DE %s1 % %& GC" \$(** z&(GC

Standard Specifications

z
fl ! E
z
z

ALTERNATOR

fl E
fl " E
fl \$\$\$ \$\$\$ E
fl " \$ E

TRANSFER SWITCH

fl

AVP 550


Volvo Penta
Mecc Alte
D+' &''



Manufacturer		Volvo Penta	
Model		TAD1641GE	
		% \$ \$ ' "# "	
		484,00 kw [658,00HP]	
	L	16,120	
	"	144x165	
		16,5:1	
	fl # 7	"# "	1500
	fl 7	L	48,00
		L	60,00
AbsorbedAirDischargeReSourceKey.Text	' # "	38,00	
	' # "	606,00	
		24 V d.c.	
			+) I
			76,30


		Mecc Alte	
		ECO40 3S/4	
	Hz	50	
	"	500,00	
7cg		0,80	
		3	
	fl 7	400/230	
	A	721,00	

AVP 550	4700,00	3341,00	1550,00	2196,00	
MS 80		4810	1606	2615	850

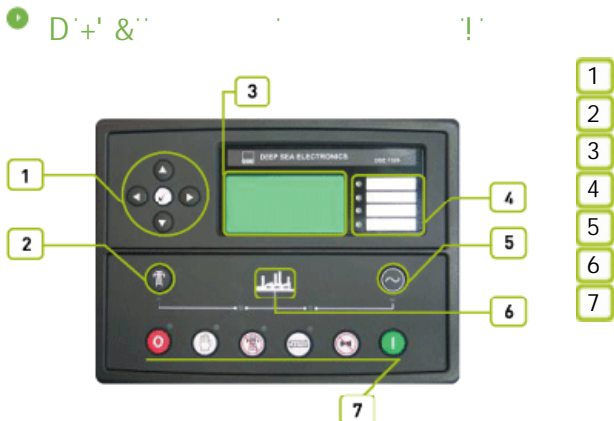

AVP 550

Volvo Penta
Mecc Alte
D+' &'

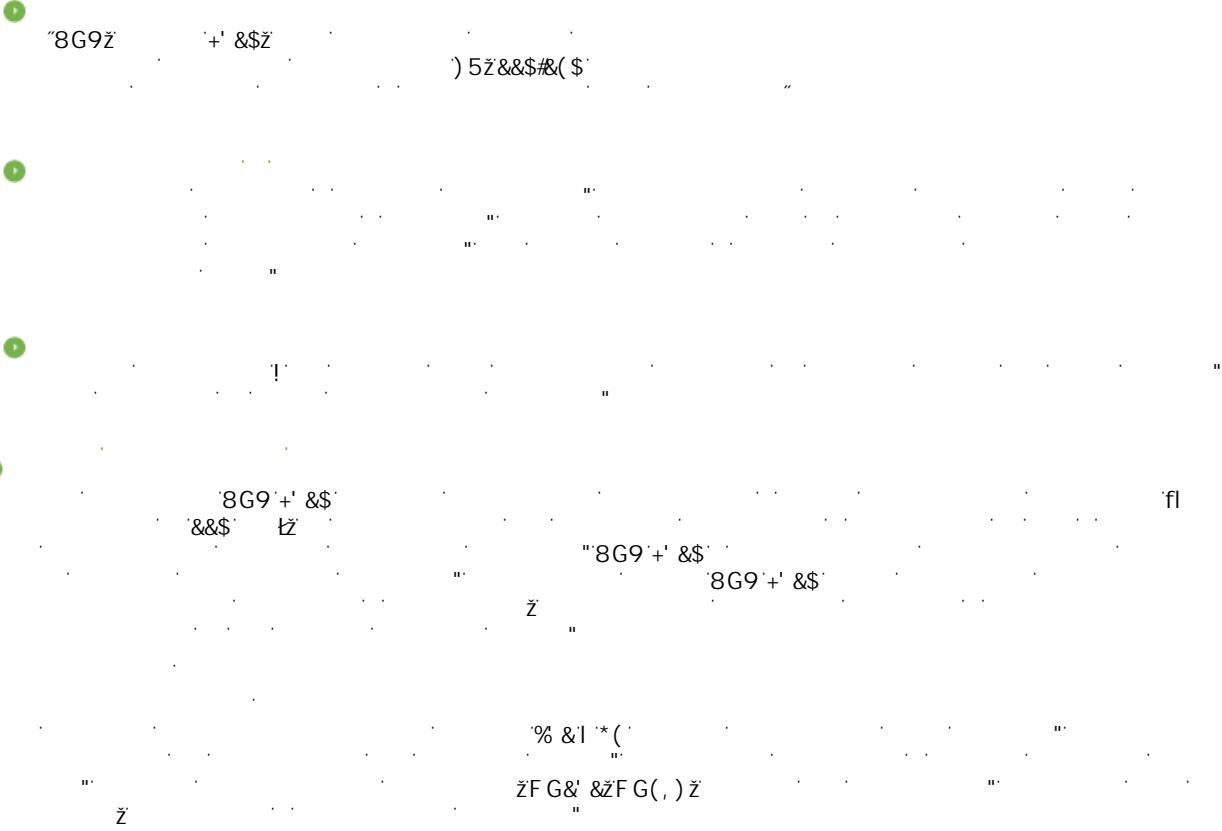

AVP 550

Volvo Penta
Mecc Alte
D+ &



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '*\$-\$)

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž

GA 8

!&+""

ž

AVP 550

Volvo Penta
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850