

AVP 450

Volvo Penta
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
z) \$ z' z' D:

	kw	Amp
400/230	450,00	591,80
	360,00	
	410,00	
	328,00	

Standard Specifications

ALTERNATOR

TRANSFER SWITCH

AVP 450

Volvo Penta
Mecc Alte
D+' &'



Manufacturer	Volvo Penta		
Model	TAD1344GE		
		399,00 kw [543,00HP]	
	L	12,780	
	"	131X158	
		18,1:1	
	"# "	1500	
	L	36,00	
	L	44,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	28,00	
	' # "	390,00	
	' # "	67,50	
	° C	465,00	
		24 V d.c.	
	Load	%\$i	'+)
	# "	83,10	63,30 42,80

	Mecc Alte		
	ECO40 2S/4		
	Hz	50	
	"	450,00	
7cg'		0,80	
		3	
	fl 7	400/230	
	A	649,50	


		fl 7		fl 7	
	"	"	"	"	L
AVP 450		3213,00	1550,00	1855,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	4200	4460	1606	2477	700

AVP 450

Volvo Penta
Mecc Alte
D+' &'



1 D+' &'

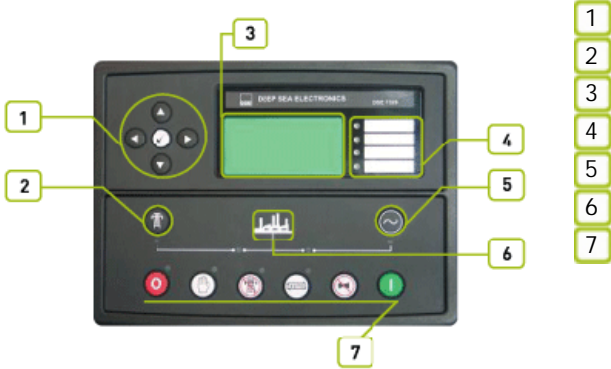

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

% &1 *(' žFG&' &žFG(,) ž

AVP 450

Volvo Penta
Mecc Alte
D+ &



f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

#

#

#

#



f&%) +t

f&)(, t

f&%) \$t

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž


GA 8

!&+""

ž

AVP 450

Volvo Penta
Mecc Alte
D+ &

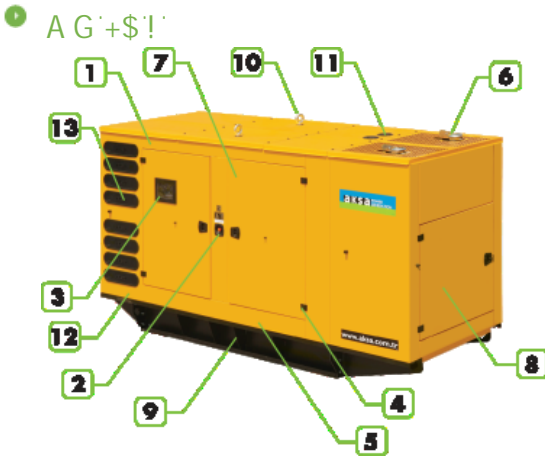

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700