

AVP 700

Volvo Penta
Mecc Alte
D+ &

AKSA POWER DIESEL



ISO8528	GC,) &
SZUTEST	GC - \$\$\$%
CE	

2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	710,00	568,00	640,00	512,00	925,00

fP GDE

GC,) &

fDF DE

%\$! % %&

GC " \$(**

z&(

GC

Standard Specifications

z

fl ! E

z

z

fl ! E

z

ALTERNATOR

fl ! E

fP \$\$\$ \$\$\$

fl ! " \$ E

fl ! E

z

TRANSFER SWITCH

fl ! E

AVP 700

Volvo Penta
Mecc Alte
D+' &'




Manufacturer		Volvo Penta	
Model		TWD1643GE	
		% \$ \$ ' "# "	
		613,00 kw [834,00HP]	
	L	16,120	
	"	144x165	
		16,5:1	
	fl # 7	"# "	1500
	fl 7	L	48,00
		L	128,00
AbsorbedAirDischargeReSourceKey.Text	' # "	46,96	
	' # "	600,00	
		24 V d.c.	
			+) I
			95,60

		Mecc Alte	
		ECO40 2L/4	
	Hz	50	
	"	670,00	
7cg		0,80	
		3	
	fl 7	400/230	
	A	967,00	

AVP 700	4315,00	3537,00	1550,00	2253,00	
MS 85		5297	1606	2656	1000

D+' &'

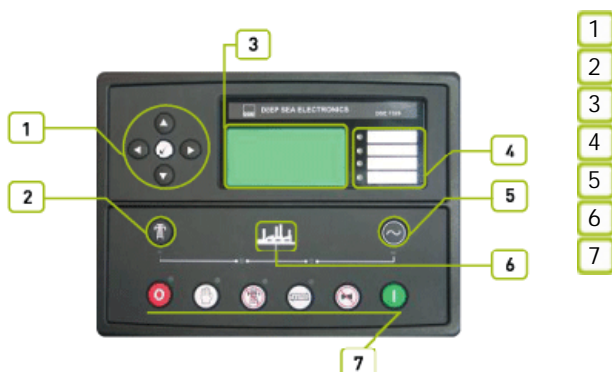

AVP 700

Volvo Penta
Mecc Alte
D+' &'



- 1 8G9ž ' + ' &\$ž) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+' &\$ ž fi
&&\$ ž
"8G9'+' &\$
8G9'+' &\$ ž
% &I '* (ž
žFG&' &žFG(,) ž ž

AVP 700

Volvo Penta
Mecc Alte
D+ &



f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

#

#

#

#



f&)+t

f&)(, t

f&)% \$t

6G'9B '* \$-) \$

6G'9B '* %\$\$\$! *!&

6G'9B '* %\$\$\$! *!(

#



ž

%, !&*(

ž
&(\$)

ž

ž


GA 8

!&+""

ž

AVP 700

Volvo Penta
Mecc Alte
D+ &

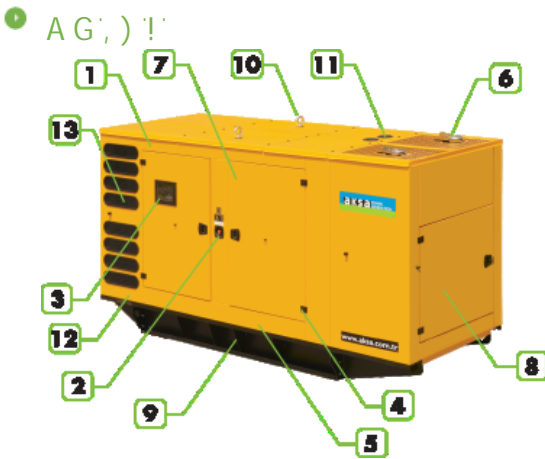

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000