


AD 750

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	750,00	600,00	680,00	544,00	982,00

fP GDE

GC,) &

,) & z

fDF DE

%\$!

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z' 5J F

TRANSFER SWITCH

AD 750

Doosan
Mecc Alte
D+' &''

Manufacturer		Doosan		
Model		DP222LB		
		%\$\$' "# "		
		664,00 kw [890,00HP]		
	L	21,927		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	40,00	
		L	134,80	
AbsorbedAirDischargeReSourceKey.Text	' # "	42,20		
	' # "	860,00		
	' # "	101,00		
	° C	481,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	147,10	109,20	73,00


		Mecc Alte		
		ECO 40-2L/4		
	Hz	50		
	"	680,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	982,00		

		fl ı		fl ı	
	"	"	"	"	L
AD 750		3494,00	1550,00	2301,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	5400	5297	1606	2656	1000

AD 750

Doosan
Mecc Alte
D+' &'

1 D+' &'

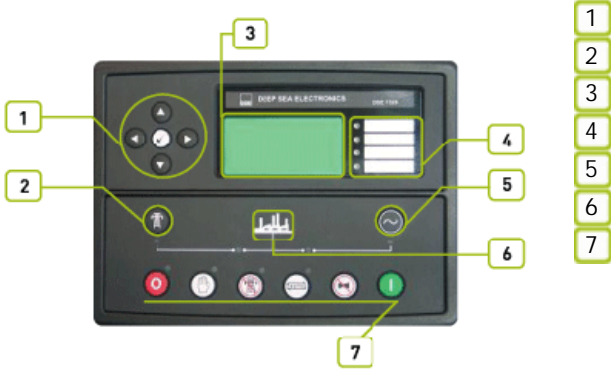

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž fI
&&\$ ž
"8G9+' &\$ ž
8G9+' &\$ ž
% &1*(ž
žFG' &žFG(,) ž

AD 750

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 750

Doosan
Mecc Alte
D+' &''

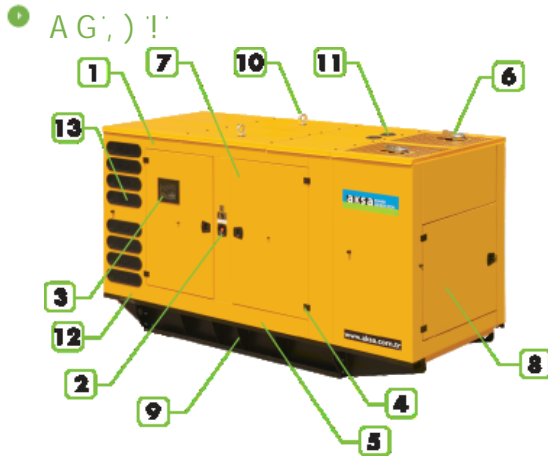

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000